
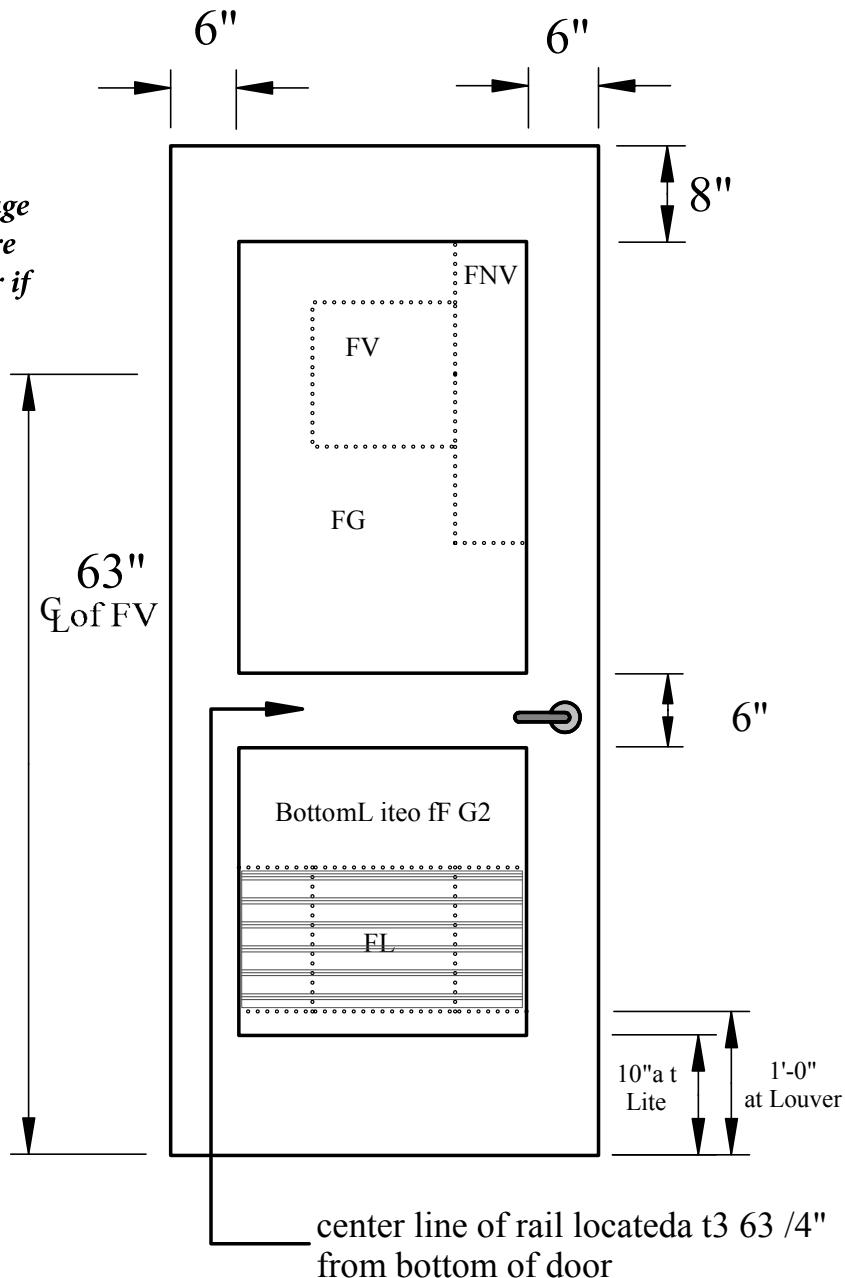


For detailed information on J/R
Metal Frames Glass Lites,
see Tech Data Sheet DD0003

*All Dimensions shown on this page
are minimum dimensions and are
referring to the inside of the door if
door is to have integral stops..*

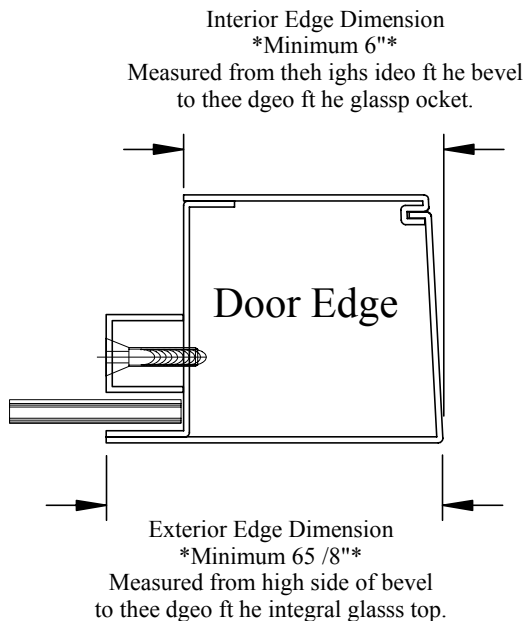

Dimension from top of door to top of "FV" vision lite to vary with door height; minimum top rail to be 8". Dimension from bottom of door to center line of "FV" lite to remain constant at 63".

Minimum dimension for bottom rail at all louvers to be 12".

ALL DIMENSIONS SHOWN ARE FOR CUTOUT IN DOOR.

IF VISION LITE KITS FROM ANOTHER SOURCE ARE TO BE USED, BE SURE TO ADD SIZE OF GLASS KIT IN FIGURING HARDWARE COMPATIBILITY.

Minimum dimension for bottom rail of glazed doors to be 10". Maximum height for bottom lite is 24". Top lite dimension will vary with height of door. Minimum top rail dimension to be 8". Minimum dimension of mid-rail to be 6"; center line at 36 3/4" from bottom of door.

All lite layouts are to be checked for conflicts with specified hardware by the distributor prior to ordering of door. Every effort will be made by J/R Metal Frames to check for problems in layout, but the responsibility lies with the distributor.

<small>MANUFACTURERS OF STANDARD AND CUSTOM HOLLOW METAL FRAMES AND DOORS</small>			
<small>287 Oakland Road, Belgrade, Maine 04917 USA Office 207-465-9066 Fax: 207-465-9452</small>			
QUALITY SINCE 1981	Title: Door Lite Location Standards		
<small>Original Date:</small> 01-19-07	<small>Revision:</small> #1	<small>Revision Date:</small> 04-25-07	<small>Drawing Number:</small> PR0007
<small>Drawn By:</small>	<small>Scale:</small> Not drawn to scale	<small>Sheet:</small> 12 of 55	