


Abutting Block

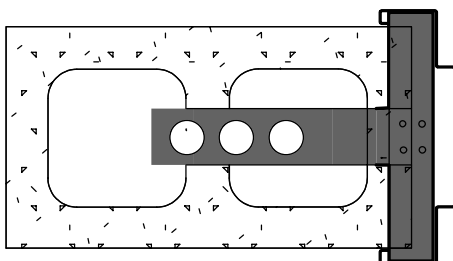


Wrapping Block

Anchors to be manufactured from
16 Gauge A-60 Galvanneal Steel.

Quantity of anchors welded to frame per HMMA Specification.

- Frames up to 60" in height 2 anchors per jamb.
- Frames greater than 60" up to 90" 4 anchors per jamb.
- Frames greater than 90" up to 96" 5 anchors per jamb.
- Frames greater than 96", 5 anchors plus one for 24" or fraction over 96", equally spaced at a maximum of 24" between anchors, per jamb.

 <small>MANUFACTURERS OF STANDARD AND CUSTOM HOLLOW METAL FRAMES AND DOORS</small>			
<small>287 Oakland Road, Belgrade, Maine 04917 USA Office 207-465-9066 Fax: 207-465-9452</small>			
QUALITY SINCE 1981	Title: Masonry "T" Anchor		
Original Date: 04-17-07	Revision:	Revision Date:	Drawing Number: PR0001B
Drawn By:	Scale: Full Sized	Sheet:	30 of 50